

# SOLID F90HD

**HIGH PERFORMANCE,  
IMPRESSIVE COST  
EFFECTIVENESS**

## Efficient Flash Fusing Printer for Sensitive Materials

### HIGHLIGHTS / FEATURES / SPECIAL ATTRIBUTES

- Prints on paper, PVC, plastic, etc.
- USB, Ethernet (10/100/1000 Mbit) as standard
- Laser and matrix printer compatible
- SAP® and AS/400 compatible (through PCL5 + JetCAPS as well as LAN-IPDS)
- Perfect control via Status Out

### FIELD OF APPLICATION

- Label batch printing
- Ticket printing
- Business and logistics documents



## Print Engine

<b>Print technology</b>	LED, OPC, xenon flash lamp with halogen preheat
<b>Controller</b>	MPC 3.4
<b>Print speed</b>	3.000 lpm (6 lpi) 12.7 m/min up to 85 pages/minute (A4 2-up)
<b>Print resolution</b>	max. 600 dpi x 600 dpi
<b>Duty cycle</b>	up to 750.000 pages (A4 2-up) (based on a using period of 60 month)
<b>Power supply</b>	230 VAC +/-10% , 50 Hz (delivery with 32 Amp. connector)
<b>Power consumption</b>	max. 5.5 KVA (in operation) max. 0.6 KVA (in stand-by)
<b>Dimensions (WxDxH)</b>	30.7" (780 mm) x 35" (890 mm) x 51.9" (1320 mm) (Printer only) 30.7" (780 mm) x 36.8" (935 mm) x 51.9" (1320 mm) (with Stacker)
<b>Weight</b>	606.3 lbs (275 kg) (with Stacker)
<b>Environment temperature</b>	15 - 30°C
<b>Relative humidity</b>	30 - 80 % (rel., non-condensing)
<b>Interfaces</b>	USB Ethernet-Interface 10/100/1000 MBit, bi-directional (TCP/IP)
<b>Optional</b>	IEEE 1284 (Centronics), WIFI IEEE 802.11 n/g/b, WEP mit 64 und 128 Bit, WPA/WPA2, WPA-PSK/WPA2-PSK
<b>Memory</b>	RAM: 4 GB Flash: 16 GB

## MPC 3.4 High-End Print-Controller

### Emulations

MICROPLEX IDOL, HP-PCL5/ HPGL, AGFA Reno, µ-Postscript, LN03+, BULL-MP6090, Etimark MP-1220, TEC Bx72, TEC B6xx, Diablo 630, IBM Proprinter, EPSON FX-80 (ESC/P), MT-600/MT40, IDS, ANSI Genicom, TIFF, XML (SAP® RFID), CUPS Raster

### Optional Emulations

CODE-V (Magnum), XEROX XES, KODESCRIPT+, Prescribe/PSB 2, IGP/PGL, Datamax, Labelpoint, LDC, ZPLII, EPL 2, Intermec Direct Protocol, IER Command, cab, Godex EZPL, HP Designjet, IPDS, AEA, PDF Direct Printing\*{more emulations on request}

### Barcodes

Codebar, Code39, MSI, PDF417, Interleaved 2/5, Interleaved 2/5 (3-Stroke Datalogic), Interleaved 2/5 (3-Stroke Matrix), EAN-8, 13, 128, Add-On-Codes, Code11, Code93, Code 128, UPC-A, UPC-E

### Optional Barcodes (Barcode 2)

Datamatrix, Maxi-Code, QR Code, Aztec-Code, USD-5 (more barcodes on request)

### Additional functions

<b>Network compatibility</b>	authentication standard IEEE 802.1X
<b>Intelligent barcode generation</b>	on-the-fly in the printer
<b>Format splitting</b>	in several subformats by command
<b>Integrated form management (RFM)</b>	Forms and fonts can be stored in the flash memory and can be accessed when needed

### Optional functions

#### Status-Out

gives notice of each correctly printed page via interface. Further features can be found in the manual.

#### Programmable GPIO-Interface (SPS-Control)

EMBEDDED INTELLIGENCE – Enabling two-way communication between printer and a PLC.

Integration of the printer into production lines is possible, controlled by GPIO-interface

Customer / Application specific modifications possible.

\* Only available with MPC 3.4, MPC 3.6, MPC 7.1 and MPC 8.x

The brand names referred to are the registered trademarks of the respective companies. Technical data is subject to change. The information contained in this specification sheet refers exclusively to the described details and not to warranted characteristics. No guarantee is assumed. The information do not exempt from the obligation for inspection of each respective individual case. Version 28.07.2022

EMEA  
APAC

**MICROPLEX PRINTWARE AG**  
Panzerstraße 5, 26316 Varel  
Germany  
Phone: +49 4451 91370  
E-Mail: sales@microplex.de

AMER  
Canada


**MICROPLEX PRINTWARE CORPORATION**  
30300 Solon Industrial Pkwy Suite E, Solon, OH 44139  
USA  
Phone: +1 440-374-2424  
E-Mail: info@microplex-usa.com



## Printable Media

<b>Size</b>	
Form length	7" - 24"
With stacker	7" - 14"
Form width	6" - 18"
Printable area	17"

**Weight** 60 - 204 g/m<sup>2</sup>

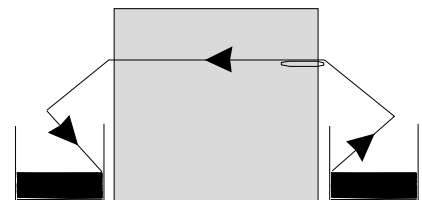

## Paper Path

### Input

push tractor

### Output

stacker

capacity: 3.000 pages (at 64 g/m<sup>2</sup>)

